



## Interior Scaffold Assembly & Operating Instructions



**READ ALL INSTRUCTIONS AND WARNINGS BEFORE USING THIS PRODUCT.**

This manual provides important information on proper operation and maintenance. Every effort has been made to ensure the accuracy of this manual.

**WARNING:** Improper erection, dismantling or use of Interior Scaffold may result in serious injury or death! Erectors, dismantlers, and users of Interior Scaffold must read and fully understand these Safety Rules and Instructions.

**MAXIMUM LOAD CAPACITY: 1000 lbs (Workers & Materials)**

**WARNING: DO NOT OVERLOAD SCAFFOLD! IT MAY RESULT IN SERIOUS INJURY!**

**SPECIFICATIONS**

<b>Total Length</b>	<b>Total Width</b>	<b>Total Height</b>	<b>Total Weight</b>
<b>73 ¾ in</b>	<b>29 ¼ in</b>	<b>74 ¾ in</b>	<b>139 lbs</b>

# ASSEMBLY INSTRUCTIONS

For proper assembly, the Interior Scaffold must be comprised of 13 individual parts. (See Figure A)

Note: Latch pins attached to Casters

Item	Part Name	Qty
A	End Frame	2
B	Truss	2
C	Deck	1
D	Caster	4
E	Latch Pin	4

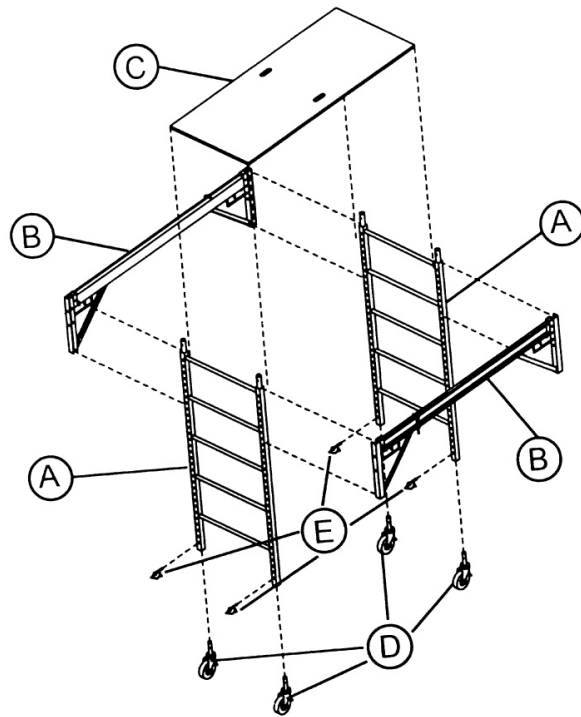


Figure A

## STEP 1

Attach Truss (B) to End Frame (A):

- Pull Lock Pin at one end of Truss to disengage position (See Figure B)
- While holding Lock Pin in disengaged position, place U-channel on end of Truss (B) around Leg of End Frame (A).
- Release Lock Pin and be sure that pin fully engages into hole in End Frame (A) leg.
- Repeat step 1 with Second End Frame (A).

## STEP 2

- Use Instructions in Step 1 to attach Second Truss.



Figure B

## WARNING:

- **BOTH TRUSSES MUST BE POSITIONED AT SAME HEIGHT ON THE END FRAMES SO THAT DECK WILL BE LEVEL**
- **BE SURE ALL LOCK PINS ARE FULLY ENGAGED IN HOLES OF END FRAMES.**
- **REMOVE THE DECK BEFORE ADJUSTING THE DECK LEVEL.**

### STEP 3

- Install Deck (C) on Trusses (B) so that Deck is fully seated within ledge or inner channel on top of Trusses (B). Truss locator pins must align to corresponding holes in Deck.

### STEP 4

- Rotate the Deck Latch into the engaged position (See Figure C)

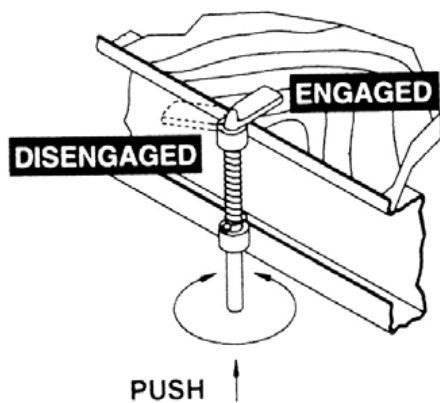


Figure C

### STEP 5

- Install 4 Casters (D) into legs of End Frames (A) and pin with latch pins (E) provided.

### WARNING:

- **RECHECK ALL TRUSS LOCK PINS FOR FULL ENGAGEMENT BEFORE ACCESSING DECK.**
- **RECHECK DECK TO BE SURE IT IS PROPERLY SEATED WITHIN TRUSS CHANNEL AND THE DECK LATCHES ARE FULLY ENGAGED BEFORE ACCESSING.**
- **WHEN ACCESSING DECK, CLIMB OVER TOP OF END FRAME LADDER – DO NOT SWING AROUND SIDE OF END FRAME.**
- **REMOVE THE DECK BEFORE ADJUSTING DECK LEVEL.**

## **DISMANTLING NOTES**

The work of dismantling scaffolding should be under the supervision of an individual with proper experience and aptitude. The following should be observed while dismantling:

- 1.** It shall be the responsibility of the user to read and comply with the following common sense guidelines that are designed to promote safety in the dismantling of scaffolding.
- 2.** Check to see if scaffold has been structurally altered in any way that would make it unsafe; and, if so, reconstruct where necessary before commencing with the dismantling procedures.
- 3.** Dismantle scaffold from the top down. Begin by removing all accessories from that section being dismantled at the time.
- 4.** On stacked scaffolds do not remove ties and braces until dismantling has reached the section to which they are attached.
- 5.** Always work within the inside of the scaffolding.
- 6.** When moving up or down the scaffold do NOT climb on ties, braces or un-braced components. Climb over the top of the frame. Do not swing around outside of the frame.
- 7.** Be sure that area below is clear of individuals not involved in the dismantling and is secured against unauthorized access.
- 8.** Lower scaffold components in a safe manner as they are dismantled. Avoid dropping or throwing the components as this could result in injury or damage to the equipment.
- 9.** Use energy absorbing lanyards and full body harness when feasible

## **SCAFFOLDING SAFETY RULES**

**SERIOUS INJURY OR DEATH MAY RESULT FROM IMPROPER ERECTION OR USE** of scaffolding equipment. Erectors and users must be familiar with and follow safe practice and the Safety Rules contained herein. These Safety Rules cover generalized situations only and should not be used to replace any other additional safety and precautionary measures that may be necessary to cover the many usual or unusual conditions encountered during installation or dismantling. The Rules are not intended to conflict with, or supersede the requirements of OSHA or any other governmental regulations, codes and ordinances; the user must refer to and comply with all such specific provisions of law.

- 1. FOLLOW SAFE PRACTICE OF THE SAFETY RULES AND COMPLY WITH OSHA** and all other federal, provincial and local regulations, codes and ordinances pertaining to scaffolding during any use of the equipment.
- 2. THE POTENTIALLY HAZARDOUS NATURE OF SCAFFOLDING ERECTION WORK** makes it important that all personnel assigned to this work be instructed in these Safety Rules, safe practices and procedures and be under the supervision of an experienced and knowledgeable person. Assure that these Safety Rules are posted and that all persons erecting and using the scaffold are aware of and follow them.
- 3. REPORT ANY UNSAFE CONDITIONS TO SUPERVISORS.** Do not work or allow persons to work on scaffolds when sick or suffering from dizziness, unsteadiness or other physical symptoms which could affect their ability to work safely.
- 4. INSPECT ALL EQUIPMENT BEFORE USING.** Never use any equipment which is damaged, defective or deteriorated in any way.
- 5. INSPECT ERECTED SCAFFOLD FREQUENTLY** and be sure that they are maintained in safe condition, that scaffold connections have not become loose and that components have not been improperly released or removed.
- 6. MAINTAIN ALL EQUIPMENT IN GOOD REPAIR.** Never use corroded or excessively rusted equipment; the strength of such equipment is not known.
- 7. CONSULT YOUR SCAFFOLDING SUPPLIER WHEN IN DOUBT. NEVER TAKE CHANCES.**
- 8. ALWAYS READ THESE SAFETY RULES** prior to use.
- 9. ALWAYS SUPPORT SCAFFOLDS FROM A SOUND, STABLE SURFACE** and assure that it is adequate to support the intended scaffold loads. Never support scaffolds on unstable, loose objects which could tip, break or become dislodged.
- 10. LIFT AND LOWER COMPONENTS CAREFULLY AND SAFELY;** never allow excessive quantities of components to be stockpiled on partially complete scaffolds. Stock only sufficient components consistent with the progress of the work. Lower dismantled components as soon as possible. Never drop components deliberately.
- 11. FREE STANDING SCAFFOLDS** other than wall scaffolds must be restrained from tipping by guying or other means, recognizing that stability is essential to the safety of the scaffold.
- 12. INSTALL GUARDRAILS, MIDRAILS, AND TOEBOARDS** at all openings, open sides and ends of every work platform when recommended or required.
- 13. NEVER USE LADDERS OR MAKESHIFT DEVICES** on top of scaffold to increase the height. Never place plank on or stand on guardrails and mid-rails.

**14. POWER LINES NEAR SCAFFOLDS ARE DANGEROUS.** Use extreme caution and consult the power service company to have the lines de-energized, insulated or otherwise rendered safe. Never allow any installation or use of scaffolds until this is done.

**15. FOR ROLLING SCAFFOLDS, FOLLOW THESE ADDITIONAL SAFETY RULES:**

- a. Never ride rolling scaffolds.
- b. Remove all material and equipment from the scaffold before moving.
- c. Lock caster brakes at all times the scaffold is not being moved.
- d. Do not attempt to move rolling scaffolds without sufficient help and roll on level surfaces only. Watch out for holes or floor obstructions and for overhead obstructions, including power lines, energized crane ways, and other hazards.
- e. The maximum platform height of a rolling scaffold must not exceed four (4) times the narrowest dimension. Check local provincial/OSHA Regulations for other height/base limitations. Comply with these regulations by appropriately widening and /or lengthening the scaffold at the lower levels so that the above proportions are not exceeded. If the base dimensions cannot be increased, extreme care must be taken to secure the scaffold from tipping; it must remain in a stabilized condition at all times so that it cannot tip over while supporting persons, while being moved or while being erected or dismantled.
- f. Apply pulling or pushing forces at the bottom frames and as close to the scaffold base as possible. Never attempt to move scaffold from on top.
- g. If rolling scaffolds are used outdoors, care must be taken to assure that they cannot become unstable due to wind or other conditions.

**R. DO NOT OVERLOAD SCAFFOLD.** Refer to and do not exceed the scaffold load capacities.



**COMPONENTS NEEDED FOR INTERIOR SCAFFOLD TOWER.**



**600S-02 Guardrail Kit with built in Toe Boards.**



**600S-03 Left and Right Outriggers (Kit of 4)**



**SCAFFOLD CONFIGURATION**

(2 SECTIONS /W OUTRIGGERS AND GUARDRAIL KIT)

